
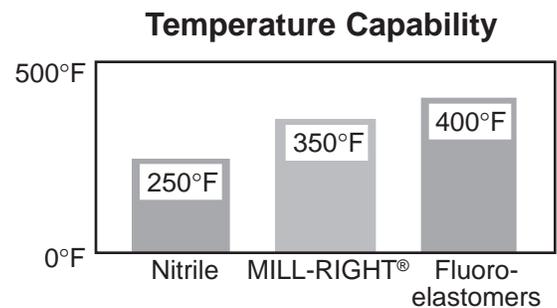


KLOZURE® Oil Seals & Bearing Isolators

Seal in your profits™

GARLOCK KLOZURE® ELASTOMERS

	NITRILE	MILL-RIGHT®	VITON®
Temperature Capability	250°F (122°C)	350°F (177°C)	400°F (205°C)
Shaft Speed Capability (MODEL 64®)	7000 fpm	7000 fpm	7000 fpm
Abrasion Resistance ASTM D3389	500 Mg/K	150 Mg/K	400 Mg/K

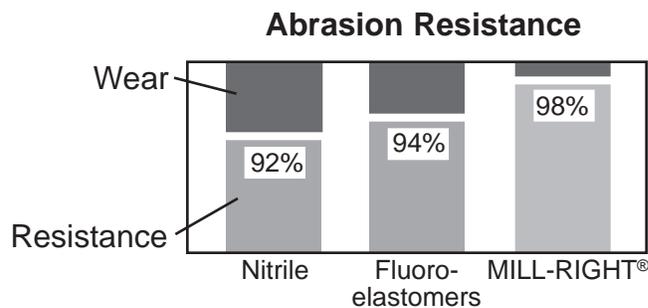

Durometer Shore A	70 - 90	70 - 75	70 - 80
Tensile, psi	2016	3874	1600
Elongation %	318	316	500
Specific Gravity	1.32	1.17	1.86

Air Aged, 70 Hr. at 300°F (147°C)

Durometer Chg., Pts.	+14	+8	—
Tensile Chg., %	-15.3	-2.7	+16
Elongation Chg., %	-82.1	-29.4	-33

Oil Aged, 1Wk/300°F (147°C)

ASTM Oil #3			
Durometer Chg., Pts.	-3	-11	—
Tensile Chg., %	+0.1	-4.1	-2.7
Elongation Chg., %	-6.9	-16.8	+4.2
Volume Chg., %	+5.5	+18.6	+2.0

More than just great products...

Beyond offering you the widest available range of products for packing and sealing, Garlock enhances the value of its products with technical services and comprehensive training programs:

- ISO 9002-94 registration for Industrial Gasketing, Industrial Packing, KLOZURE® Oil Seals, Bearing Protectors, Expansion Joints, Hydraulic Components, Mechanical Seals, and Industrial Rubber Products.
- A global network of stocking Authorized Garlock Distributors.
- Factory sales representatives and applications engineers available for problem solving when and where it is needed.
- Toll-free 800 telephone and FAX numbers for immediate product information.
- In-plant surveys of equipment and processes, providing the customer with recommendations to identify and eliminate sealing and packing problems before they start.
- The most sophisticated and most comprehensive test facilities available.
- Technical field seminars on all Garlock products.
- Factory-sponsored product training programs, including hands-on seminars, to ensure that Garlock representatives and their distributor personnel are the best in the industry.
- Technical Bulletins to keep you up-to-date on product enhancements and changes.

Customers who specify Garlock fluid sealing products get, at no extra cost, the high quality support needed to run a profitable operation.

AUTHORIZED DISTRIBUTOR



**ISO 9002-94
Cert. #001762**

WARNING:

Properties/applications shown throughout this brochure are typical. Your specific application should not be undertaken without independent study and evaluation for suitability. For specific application recommendations consult Garlock. Failure to select the proper sealing products could result in property damage and/or serious personal injury.

Performance data published in this brochure has been developed from field testing, customer field reports and/or in-house testing.

While the utmost care has been used in compiling this brochure, we assume no responsibility for errors. Specifications subject to change without notice. This edition cancels all previous issues. Subject to change without notice.

GARLOCK is a registered trademark for packings, seals, gaskets, and other products of Garlock.

© Garlock Inc 2001. All rights reserved worldwide.

GOODRICH

Garlock Sealing Technologies
1666 Division Street
Palmyra, New York 14522 USA
1-315-597-4811
1-800-448-6688
Fax: 1-800-543-0598
1-315-597-3216

Visit the Garlock network
www.garlock.net

Other Garlock facilities are located in:

Paragould, AR, USA	1-870-239-4051	Fax: 1-870-239-4054
Columbia, SC, USA	1-803-783-1880	Fax: 1-803-783-4279
Houston, TX, USA	1-281-459-7200	Fax: 1-281-458-0502
Sydney, Australia	61-2-9793-2511	Fax: 61-2-9793-2544
São Paulo, Brazil	55-11-884-9680	Fax: 55-11-884-9680
Berkshire, England	44-1635-38509	Fax: 44-1635-569573
Saint-Étienne, France	33-4-7743-5100	Fax: 33-4-7743-5151
Neuss, Germany	49-2131-3490	Fax: 49-2131-349-222
Seoul, Korea	822-554-6341	Fax: 822-554-6343
Mexico City, Mexico	52-5-567-7011	Fax: 52-5-368-0418
Singapore	65-284-7873	Fax: 65-284-6089

Garlock
Sealing Technologies®